

Converter® 5000 liters

H5000/MO5000

SPECIFICATIONS


total installed power:	520 kW
nominal motor power*:	500 kW
nominal current:	600 A
starting current:	750 A
machine footprint:	8000 mm 2500 mm 6500 mm height
dry weight:	16000 kg
treatment chamber volume:	5000 lt
production rate:	hospital waste 500 to 600 kg/h urban waste 1500 to 1800 kg/h

AVERAGE CONSUMPTION

electricity:	around 0,4-0,6 kW/kg based on waste moisture content
--------------	--

Optionals

- WRS
Water Recirculation System
- Sound-proofing cabin
(from 95 dB to 80 dB)

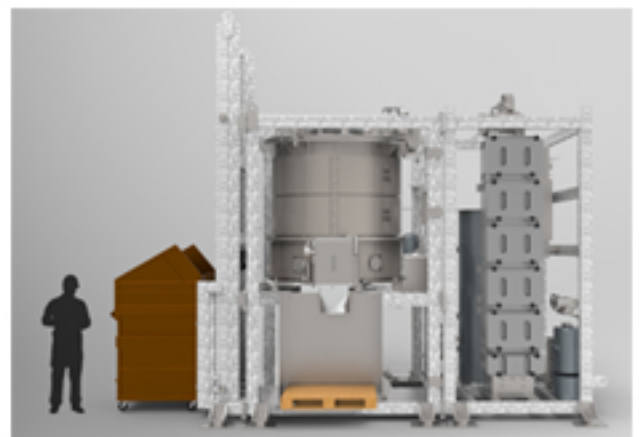

Room requirements:


- Room ventilation: 10 air changes per hour
- Working environment temperature: 6°C ÷ 45°C

Converter® 5000 liters

H5000/MO5000

Machine positioning and minimum maintenance spaces:

Equipment Clear Area (different solutions available upon request)

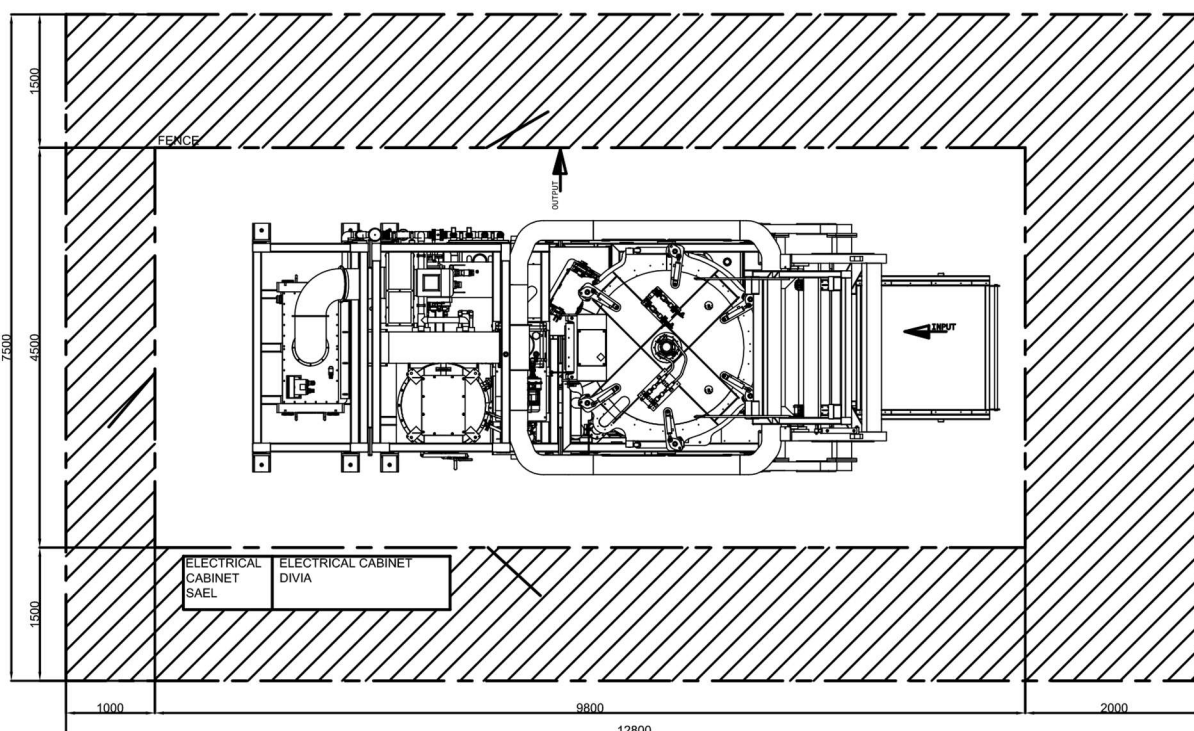

ELECTRICAL CABINETS DIMENSIONS

width: 1600 mm

depth: 800 mm

height: 2100 mm

weight: 1200 kg

(OMPeco supplies 3 linear meters of interconnection cables between cabinets and machine)

OMPECO

OMPECO s.r.l.
Via Cavalieri del Lavoro 16
10024 Moncalieri
Torino, Italy
www.ompeco.com
info@ompeco.com

Legal headquarters and billing address:
Corso Laghi 26
10051 Avigliana - Torino, Italy
Reg. Imp. RI/PRA/2014/46068/800
R.E.A. di Torino 1188899
VAT n° IT11118350013

Information, photos and description contained in this publication are supplied for informative purpose and are not binding.

© 2020 OMPeco